

SSC-500-F SPECIFICATIONS

LARGE WALL SPEAKERPHONE WITH KEYPAD FOR LOW POWER CONSUMPTION


Standard Analog Power, but also available in VoIP versions

Stainless steel wall mount payphone size low power consumption handsfree speakerphone with keypad for standard dialing, push button for dial tone, and red LED light to indicate phone is activated. Press button to disconnect call. Telephone can be programmed to cancel calls after 1, 3, or 5 minutes or no time out. Equipped with marine quality chrome tone dial keypad, weatherproof, puncture resistant speaker and microphone, instruction or advertising window, ID window, tamper resistant security screws, and mounting backplate.



SPECIFICATIONS

Panel Size:	7.5" W x 21" H x 4.10" D
Weight:	Approximately 16 lbs.
Mounting Instructions:	Vertical Surface Mount: Separate the cover assembly from the backplate. The backplate assembly is designed to be mounted on any flat vertical surface. Four mounting holes are provided
Environment:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
Input Power:	Telephone Line Powered
Programming:	Mini-Jumpers
Loop Current:	27mA min 80mA max
Impedance:	600 ohms
Type Jack:	RJ11C
Ringer Equivalency:	0.4A
UL & FCC Registration:	Certified
ACCESSORIES:	301-037 Security Tool (required for installation)

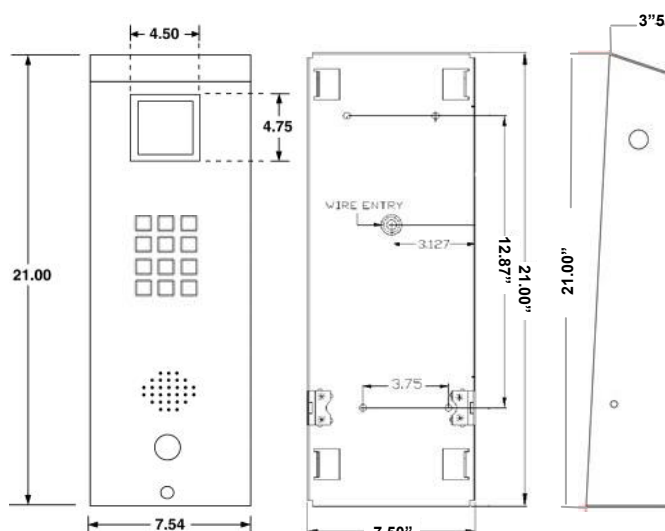

ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

-RIS	-RIL	Additional Options & Features
		Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
Ring Indicator Flashing Blue Light (Requires AC Power)	Ring Indicator Light located on the phone panel for visual ring indication	



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company
<http://www.ceeco.net>
Email: sales@ceeco.net

519 SW Park Street
Okeechobee, FL
Voice 863-357-0798
Fax 863-357-0006