SSW-521-D SPECIFICATIONS

MINI WALL HANDFREE SPEAKERPHONE WITH AUTODIAL BUTTON
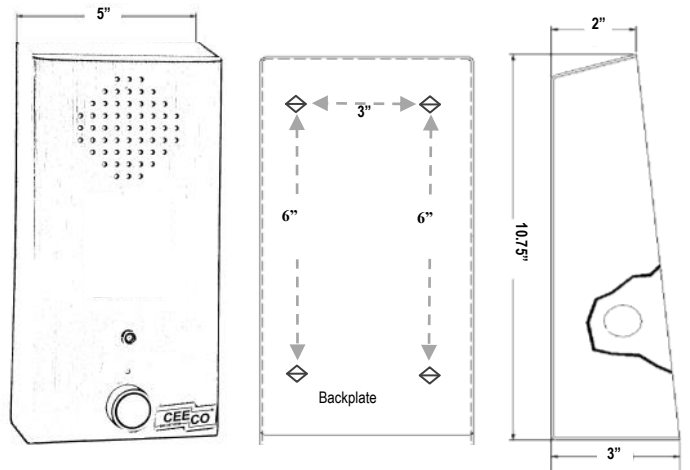
Standard Analog Power, but also available in VoIP versions

Rugged small stainless steel wall mount handsfree speakerphone that dials a preprogrammed number from 1-11 digits when the button is pushed and red/green LED light provides visual indication of call progress. Ability to dial a PBX or access number, block or allow incoming calls, and provide call duration time-out from 1-9 minutes or no time-out. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Equipped with weatherproof, puncture resistant speaker and microphone, security screws, and steel mounting backplate. ADA Emergency features available to include Braille EMER Phone plate, visual call progress light, and red push button..

SPECIFICATIONS

Panel Size:	5" W x 10.75" H x 3" D
Weight:	Approximately 7 lbs.
Mounting Instructions:	**Vertical Surface Mount:** Separate the cover assembly from the backplate. The plate assembly is designed to be mounted on any flat vertical surface. • Four mounting holes: 3" W x 6" H
Environment:	Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating
Input Power:	Telephone Line Powered
Programing:	Via DTMF Keypad
Loop Current:	30mA min to 80mA max
Impedance:	600 ohms
Type Jack:	RJ11C
Ringer Equivalency:	0.4A
UL& FCC Registration:	Certified
ACCESSORIES:	301-037 Security Tool **(required for installation)**

ADDITIONAL OPTIONS — **IP - Voice over Internet Protocol Version available on all models (SIP)**

-ADA	**-RIS**	**-RIL**	**Additional Options & Features**
			Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
• Red/ green LED call progress indicator light • Braille Emergency Plate "EMERG. PHONE" • Red push button	Ring Indicator Flashing Blue Light *(Requires AC Power)*	Ring Indicator Light located on the phone panel for visual ring indication	

Providing Telecommunication Solutions Since 1930