

SSW-521-F SPECIFICATIONS

MINI WALL HANDFREE SPEAKERPHONE WITH KEYPAD

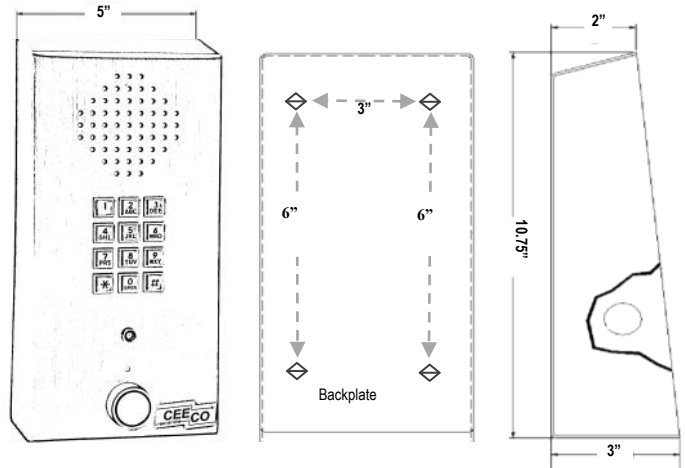
Standard Analog Power, but also available in VoIP versions

Rugged small stainless steel wall mount handsfree speakerphone with keypad, push button for dial tone, and red/green LED light provides visual indication of call progress. Telephone can be programmed with call restrictions, ability to dial a PBX or access number, allow or block incoming calls, provide call time-out from 1-9 minutes or no time-out. Telephone can not be left off-hook, as it detects when called party hangs up and resets itself. Equipped with marine quality chrome tone dial, weatherproof, puncture resistant speaker and microphone, security screws, and steel mounting backplate.





SPECIFICATIONS

Panel Size:	5" W x 10.75" H x 3" D
Weight:	Approximately 7 lbs.
Mounting Instructions:	<p>Vertical Surface Mount: Separate the cover assembly from the backplate. The plate assembly is designed to be mounted on any flat vertical surface.</p> <ul style="list-style-type: none"> Four mounting holes: 3" W x 6" H
Environment:	<p>Temperature: -30°C (-22°F) to 60°C (140°F) Humidity: 0%-90% non-condensating</p>
Input Power:	Telephone Line Powered
Programing:	Via DTMF Keypad
Loop Current:	30mA min to 80mA max
Impedance:	600 ohms
Type Jack:	RJ11C
Ringer Equivalency:	0.4A
UL& FCC Registration:	Certified
ACCESSORIES:	301-037 Security Tool (required for installation)



ADDITIONAL OPTIONS

IP - Voice over Internet Protocol Version available on all models (SIP)

-RIS	-RIL	Additional Options & Features
		Auto Answer (AA) Remote Programming (RP) Voice Announcement (VA)
Ring Indicator Flashing Blue Light (Requires AC Power)	Ring Indicator Light located on the phone panel for visual ring indication	



Providing Telecommunication Solutions Since 1930

Communication Equipment
& Engineering Company

519 SW Park Street
Okeechobee, FL

<http://www.ceeco.net>

Voice 863-357-0798

Email: sales@ceeco.net

Fax 863-357-0006